KAMAI HYBRID TV MEDIA PLAYER

510 Series Product Manual





Table of Contents

OVERVIEW

- 2 What's Included
 - Front and Rear Panel
- 5 Side Panel

CONNECTING VIDEO

- 6 High-Definition TVs
- 7 Standard-Definition TVs

CONNECTING AUDIO

- 8 Stereo
- 8 Surround Sound

CONNECTING TV SOURCE

9 Cable or Antenna

CONNECTING NETWORK

10 Wireless or Wired

POWERING UP

- 1 Setting up Remote Control
- 2 Connecting to Power Source

COPYRIGHT

©2012 Entone, Inc. All rights reserved. This document contains proprietary information protected by copyright. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior written consent of Entone, Inc., 20863 Stevens Creek Blvd, Suite 300, Cupertino, CA 95014, U.S.A.

DISCLAIMER

IF THIS PRODUCT DIRECTS YOU TO COPY MATERIALS, YOU MUST HAVE PERMISSION FROM THE COPY-RIGHT OWNER OF THE MATERIALS TO AVOID VIOLATING THE LAW WHICH COULD RESULT IN DAMAGES OR OTHER REMEDIES.

TRADEMARKS

Entone and the tagline "Connecting the Home" are trademarks of Entone, Inc. All other trademarks or registered trademarks belong to their respective owners.

CHANGES

The material in this document is for information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, Entone, Inc. assumes no liability resulting from the use of the information contained herein. Entone, Inc. reserves the right to make changes in the product design without reservation and without notification to its users.

What's Included



Kamai Hybrid TV Media Player



IR Remote Control*




2 Batteries for Remote Control



Kamai Product Manual

Remote Control Guide*

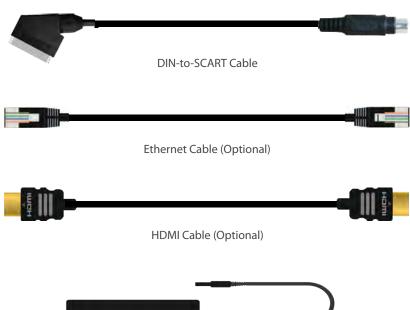



AC Power Adapter*

Additional items that may be required (not included):

- **Ethernet Cable**
- HDMI Cable
- RF Coaxial Cable
- Digital Audio Cable
- Network Router

KAMAI HYBRID TV MEDIA PLAYER

^{*}The Remote Control may vary and is dependent on your service provider.

^{*}The AC Power Adapter may vary and is dependent on your service provider.

Kamai — Side Panel



Kamai — Front and Rear Panel



Name		Description
1	Power Indicator	Solid blue indicates the unit is on Flashing blue indicates the unit is starting up
2	Antenna/Cable Connector	IEC/F port for connecting to cable / antenna source (tuner is optional item)
3	Digital Audio	S/PDIF digital optical audio TOSLINK output
4	SD Video	9-Pin DIN conector for connecting to video output using DIN-to-SCART cable
5	HDMI	Digital video and audio port for connecting to a high-definition TV (HDTV)
6	Ethernet	RJ45 plug for connecting to ADSL modem or network access equipment
7	Power	DC power jack (100-240V, Output 12V/1A)





Name		Description
1	Factory Reset	Reset the device to factory settings with a thin metal probe
2	SD Card Reader	SD Memory Card Reader For accessing media on an SD memory card
3	USB	To connect USB devices such as USB Flash Drive and External Hard Drive (max 500mA load)

KAMAI HYBRID TV MEDIA PLAYER

PRODUCT MANUAL

STEP 1: CONNECTING VIDEO

Kamai provides two video options for connecting to your TV: HDMI or Composite Video.

Select a video option and proceed accordingly.

Make sure your TV is turned on and the correct video input is selected.

Option 1: HDMI (Recommended)

If your TV has an HDMI connection, use an HDMI cable (may not be included) and connect Kamai to the HDMI IN port on your TV. This con-



nection provides both video and audio so you do not need a separate audio connection. Proceed to "Step 3: Connecting TV Source" on page 9.



Option 2: SCART Video

Use the DIN-to-SCART cable provided and connect the SCART connector SCART to the SCART IN port on your TV. This connection provides both video and



audio so you do not need a separate audio connection.

If you have already selected HDMI as your video connection, then do not use this cable.

Proceed to "Step 3: Connecting TV Source" on page 9.



KAMAI HYBRID TV MEDIA PLAYER

PRODUCT MANUAL

PRODUCT MANUAL

STEP 3: CONNECTING TV SOURCE

Kamai has two audio options: Stereo or Surround Sound. Select an audio option and proceed accordingly.

NOTE: If you have already selected HDMI as your video connection, then skip this audio section and proceed to CON-**NECTING TV SOURCE.**

Option 1: Stereo

Use the DIN-to-SCART cable provided and connect the SCART connector to the SCART IN port on your TV.

STEP 2: CONNECTING AUDIO

Option 2: Surround Sound If your TV is connected to an A/V Receiver that supports Dolby



Connect an RF coaxial cable (sold separately) from Kamai to either a basic unencrypted Cable TV source or antenna source.

NOTE: A built-in tuner for receiving off-air programs is an optional feature of Kamai. Contact your service provider for more details.



STEP 4: CONNECTING NETWORK

Select from one of the following networking options.

Option 1: Wireless

Connect your Kamai to a Wireless Network Router or Access Point.

NOTE: Internal Wi-Fi is an optional feature for Kamai. Contact your service provider for more details and instructions about the wireless network configuration.

Option #2

Connect an Ethernet cable (sold separately) from Kamai to a cable/DSL modem or Network Router.



STEP 5: POWERING UP

Setting Up Remote Control

- 1. Open the battery cover by pressing down on the battery cover latch and sliding it off.
- 2. Insert the batteries, matching the "+" and "-" marks on the batteries with the interior of the remote control.
- 3. Snap on the battery cover to close.

NOTE: Refer to the Remote Control Guide for more details about other remote control features.


KAMAI HYBRID TV MEDIA PLAYER

PRODUCT MANUAL

Connecting to Power Source

- 1. Connect the power cord to the POWER port on the back of the Kamai.
- 2. Plug the AC power adapter to a power outlet.
- 3. Follow the on-screen instructions.

NOTE: Make sure your TV is turned on and the correct video input is selected.

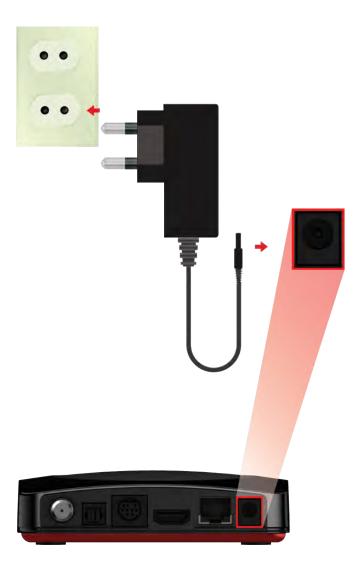

Notes



©2012 Entone, Inc. Entone, Kamai and connecting the home are trademarks of Entone, Inc. Other company, product, and service names may be trademarks or service marks of others. All information contained in this document is subject to change without notice. Information contained in this document is provided on an as is basis. In no event will Entone be liable for damages arising directly or indirectly from any use of the information contained in this document. Subject to change without notice.